
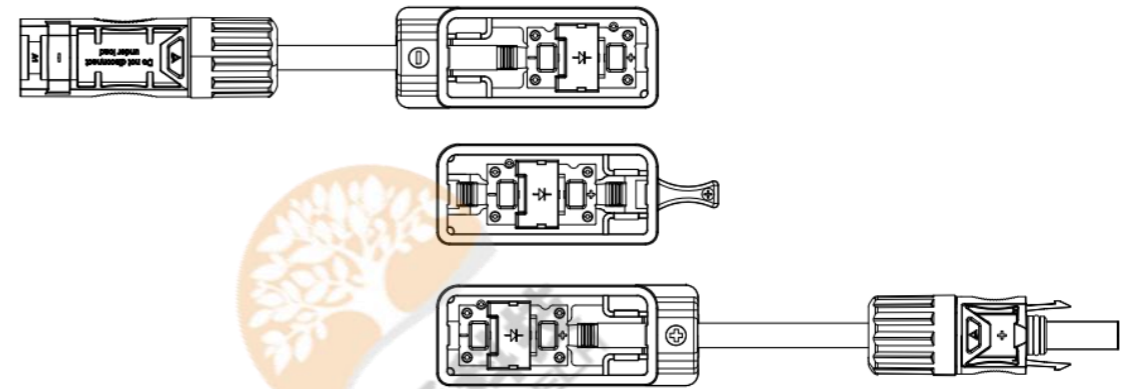


ulti/monocrystalline Module Jnction Box/ PV-YT30S

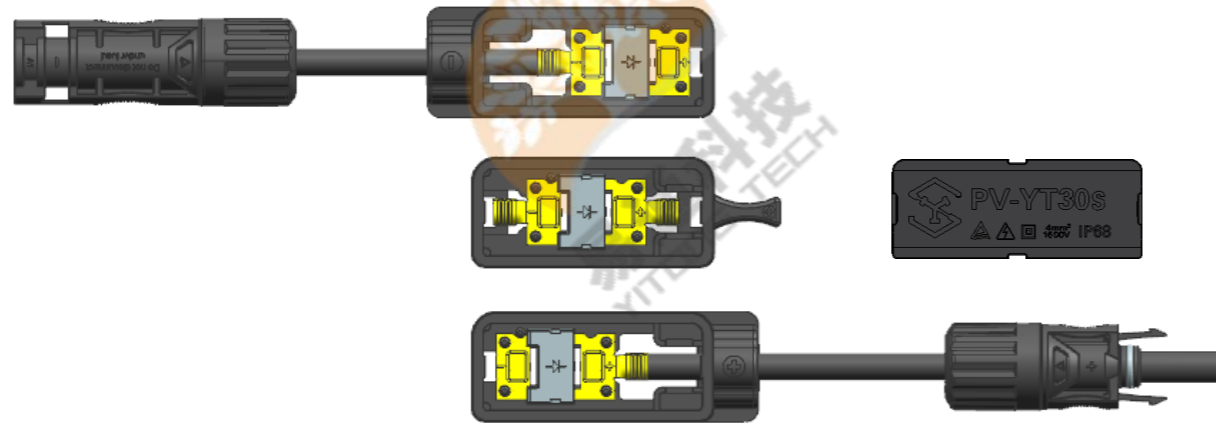

Basic Technical Data

Certifications	TUV
RATED Voltage	1500V DC
Temperature Range	-40℃~+85℃
Safety Class	Class II
Protection Degree	IP68
Wire Size Range	4mm ²
Flame Resistance	5VB
Waterproofing Structure	Potting sealant/灌封胶
Volume of silicon gel	APPr. 20.5ml/约 20.5ml
Width of copper Ribbons	Up to 8mm/最大 8mm
Connection Method	Soldering/焊接
Insulation Material	PPO
Overall Dimension	65*25*14.5 70*25*14.5
Optional Connector	YT08-1A/18-01

Product number	Rated current	Circuit	Distance between the terminals (mm)	No. of diode	Diode type
PV-YT30s	20A/25A/30A		10	3	GFMK3045 GFMK6045C GF3045 GF6045 GF6045T